


What is EcosimPro?

EcosimPro is a software tool for modelling and simulating multidisciplinary continuous and discrete systems. It incorporates an object-oriented programming language, a powerful DAE solver and a friendly Graphic User Interface.

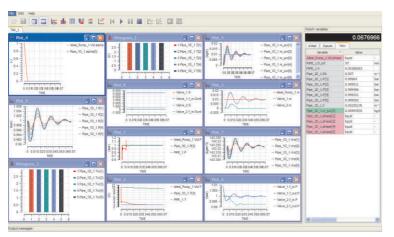

EcosimPro is designed so that components can be reused in many different systems without having to be reprogrammed. It provides a highly intuitive environment that enables the user to easily display simulation schematic diagrams and carry out both transient and steady state studies.


EcosimPro is an open tool which allows using other existing code written in C, C++ or FORTRAN and, in turn, generating C++ code with the final simulation model.

The European Space Agency (ESA) has chosen EcosimPro as its recommended tool for simulation in several fields, including space propulsion, environmental control systems and life support systems (ECLSS) and power systems.

CRYOLIB Library Developers

CRYOLIB Library is the result of collaboration between EA and CERN in order to provide a simulation tool for large cryogenic systems.

This library is based upon a previous library of CERN, that holds all rights to the library.

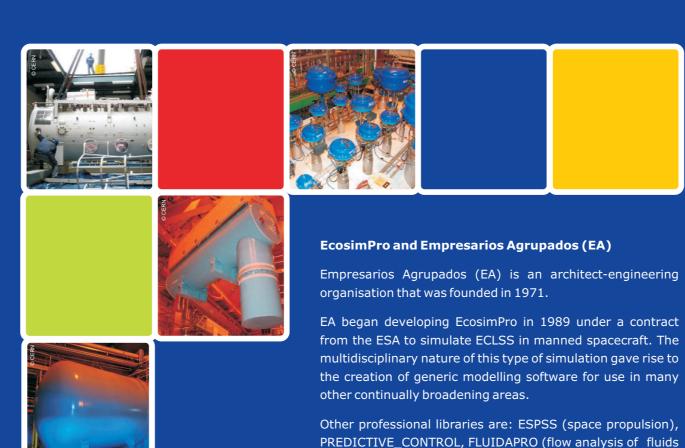

balances in power plants) and more.





The professional library, based on EcosimPro, for modelling large cryogenic systems

Empresarios Agrupados (EA)

Magallanes, 3 Madrid 28015 Spain

URL: http://www.ecosimpro.com







CRYOLIB LIBRARY

The CRYOLIB library is the result of collaboration between CERN and Empresarios Agrupados (EA) to create a specific library for the simulation of large cryogenic installations. The high complexity of these systems due to their non linearities and wide range of operation makes simulation an especially interesting tool for control engineers to develop/test control algorithms or perform virtual commisioning tasks. The library is also of great use to cryogenic engineers who wish to design new systems, and even to operators for training purposes.

The CRYOLIB library is delivered along with the source code. This allows the users both to modify and reuse any of the library components. Components have been validated with experimental data obtained from CERN installations.

OVERVIEW OF THE CRYOLIB LIBRARY

CRYOLIB allows the user to analyse in great detail transient aspects due to inertia, heat transfer or control processes. A fluid system connected with a control system can be easily represented and simulated.

CRYOLIB provides a standard set of cryogenic components that can be parametrized by

- Several configurations of plate-fin multistream heat exchangers with 1D fluid model
- Turbo machinery: Oil lubricated compressor, cold compressor, turbines, etc
- Pipes 0D and 1D
- Tanks with level calculation
- Valves of different types
- Measurement instruments


Component formulation is independent of the working fluid.

Reverse flow, inertia and high speed phenomena are considered in pipes, volumes and junctions.


A complete database of fluid properties is offered for He, N₂, Xe, Ar and O₂. Liquid, superheated, two-phase and supercritical fluids are considered. Moreover, it also provides interface functions to connect directly with HEPAK (© copyright Cryodata Inc.), a computer program for calculating the thermophysical properties of helium-4 (4He) from fundamental state equations.


A specific library of control components compatible with the UNICOS (UNified Industrial COntrol System) framework developed at CERN is provided with the installation. UNICOS aims to provide components, methodology and tools to design, build and program industrial based control systems for CERN installations.

Interaction with other software is possible, especially in the following areas: optimization subroutines for design and test fitting, coupling to external software (e.g. MATLAB, Simulink, Excel...), etc.









CALCULATION OF FLUID PROPERTIES

CRYOLIB uses the FLUID_PROP library in order to calculate the physicochemical properties of fluids.


The FLUID_PROP library is a set of thermodynamic functions of the fluids: He, N,, Xe, Ar and O₂. Real fluids properties are directly interpolated in external 2D properties files (user modifiable), obtained by running the HEPAK code in the case of Helium and the REFPROP code (NIST) for the other fluids.

The library considers the homogeneus model that calculates mixtures of a real fluid with a non-condensable gas (quality, void fraction, etc) in case of two-phase, two-fluid flow. Phase calculation is automatic.

Functions calculating real properties interpolate in 2D property tables. Two kinds of interpolations are available:

- Direct interpolation using the parameters P-S or P-H and returning a property.
- Reverse interpolation using the parameters T-S, H-S or $\, \rho$ -U and returning pressure.


Real Fluids	Liquid Range		Gas Range	
	Pres. (bar) (Psat – Pcr)	Temp.(K) (Tsat – Tcrit)	Pres. (bar)	Temp. (K)
Oxygen (O ₂)	Psat - 50.43	Tsat - 154.6	0 820	54.4 - 1000
Helium (He)	Psat - 2.27	Tsat - 5.19	0 1000	0.8 – 1500
Nitrogen (N ₂)	Psat - 33.96	Tsat - 126.2	0 22000	63.15 - 2000
Argon (Ar)	Psat - 48.63	Tsat - 150.7	0 10000	83.8 - 700
Xenon (Xe)	Psat - 58.42	Tsat - 289.7	0 7000	161.4 - 750



MODELLING OF CRYOGENIC SYSTEMS


Real fluids ranges in terms of P/T

Cryogenic installations and its control system can be easily represented with this library, and the resulting model is very close to the actual physical system

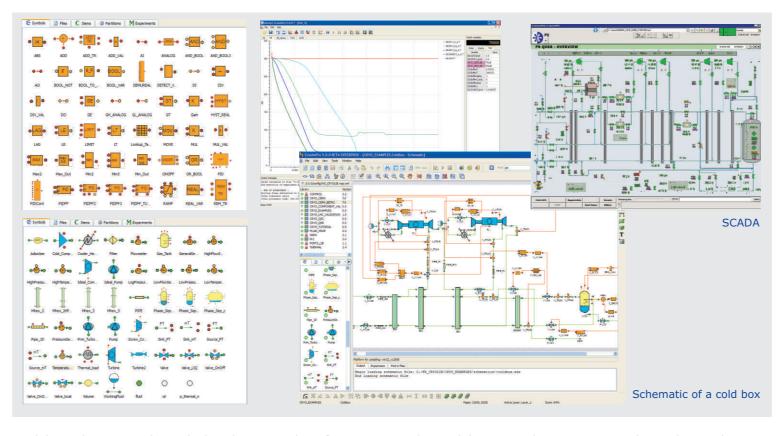


Models can be exported as a deck with an OPC client for connecting the model generated in EcosimPro with a real control system or to a SCADA system. Some of its domains of application include:

- Simulation of the complete cryogenic plant and its control system: virtual commissioning, control system development, etc.
- Design of specific cryogenic components
- Operator training. The model exported as a deck can be used in operator training simulators (e.g. PROCOS simulator at CERN)

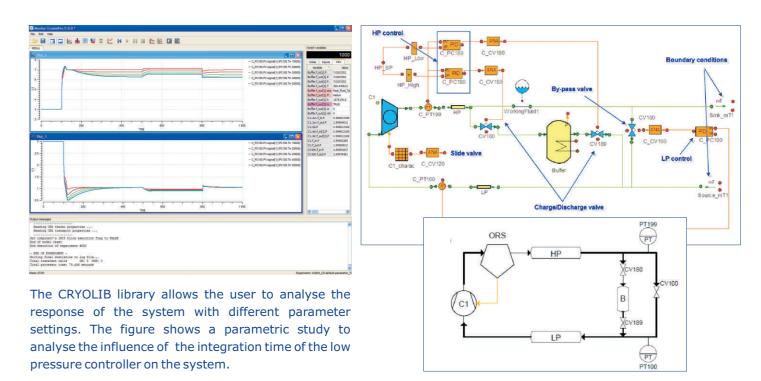

Specific cryogenic components such as cold compressors are included. A generic model is provided if the off-design characteristics are unknown to the user. The user can define specific tables for it, however.

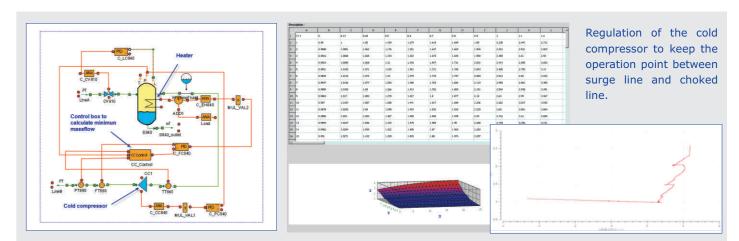

The CRYOLIB library was validated with experimental data from CERN installations. The following screenshots show a comparison of some variables during coldbox cooling. The results of the simulation satisfactorily mimic the overall dynamic response of the actual plant.

